











Recommended Euro Pratik
Special Purpose Adhesive



Euro Pratik products add natural beauty to your interiors. Colour variance, slubs, weave irregularities and shading that appear in these panels are to enhance natural beauty and are not imperfections. Utmost care has been taken to give accurate description & technical specification. Errors and omission, if any please excuse. Technical specifications of products are subject to change without prior intimation. Use the same batch material to avoid colour variation. Euro Pratik warrants that all products are free from manufacturing defects and perfectly fit for use in normal conditions. No guarantee/warranty of the product after installations. Dimension tolerance +/- 5-10%.



2440mm x 1220mm

# Where Illusion **Meets Reality**

Thermolite Elegant Panles can create a unique and modern look in any space. The sleek surface of the elegant panel makes it easy to clean and maintain, ensuring that the panel will continue to shine for years to come. Whether displayed in a living room, office, or gallery, Thermolite Elegant Panles will undoubtedly become a focal point in any room. Its contemporary aesthetic and durability make it a versatile choice for both residential and commercial spaces.





As pioneers in the industry, we at Euro Pratik intend to produce and provide innovative high-end lifestyle products with the use of cutting edge new technologies. We aspire to serve a range of demands that sprout from various market and lifestyle trends that emerge all across the world.

We take pride in our young and dynamic team that works tirelessly, dedicated to R&D and delivering products up to date. We at Euro Pratik intend to never stop expanding and adding to our 16+ years of experience.

We surge ahead with an aim to bring about a revolutionary shift in the concept of living spaces, by creating world class interior and exterior vision. Delivering to a colossal amount of 150+ cities across India, Nepal, Sri Lanka, and Bangladesh, at Euro Pratik we like to keep an edge with the ever evolving trends and needs of the market. We cater to every price point to make sure our customers are never out of options. Hence, over the years we have created our niche in the lifestyle segment and have emerged as a pioneer in the lifestyle industry whilst holding a wide range of products to choose from.







Durability

& Strength





Resistant







Resistance









02





Colour Core Panel

Durability & Strength

Water Resistance Size: 2440mm x 1220mm Thickness: 1.3mm





G-15052

Artistic Inspiration

G-15051















G-15056

G-15060

G-15151 SPARKLE

The Magical Splash





Anti Finger Print

Colour Core Panel

Scratch Resistant


Durability & Strength


Resistance

Size: 2440mm x 1220mm Thickness: 1.3mm







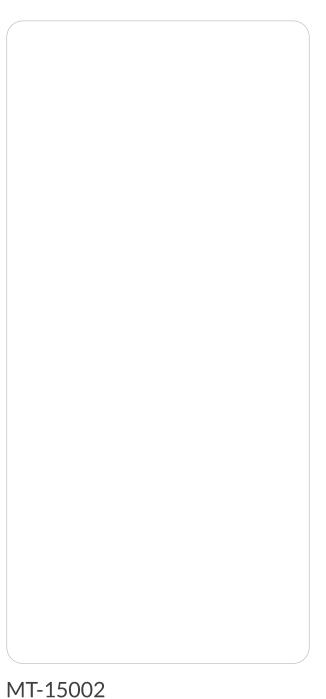



MT-15001 MT-15002 MT-15003

Selection of Creations







Anti Finger Print



Colour Core Panel



Scratch Resistant



Easy to



Durability & Strength



Water Resistance



Bore



Termite Proof



MT-15004

Size: 2440mm x 1220mm Thickness: 1.3mm







Captivating Shades



















MT-15009

MT-15007

MT-15008

The Essence of Opulence

11






Size: 2440mm x 1220mm Thickness: 1.3mm









MT-15011 MT-15012

The Sphere of Wonders






MT-15013

Size: 2440mm x 1220mm Thickness: 1.3mm









MT-15015

Inspire through Art

MT-15014







Colour Core

Scratch Resistant

Easy to Clean

Durability & Strength

Water Resistance


Borer Proof

Termite Proof

Size: 2440mm x 1220mm Thickness: 1.3mm





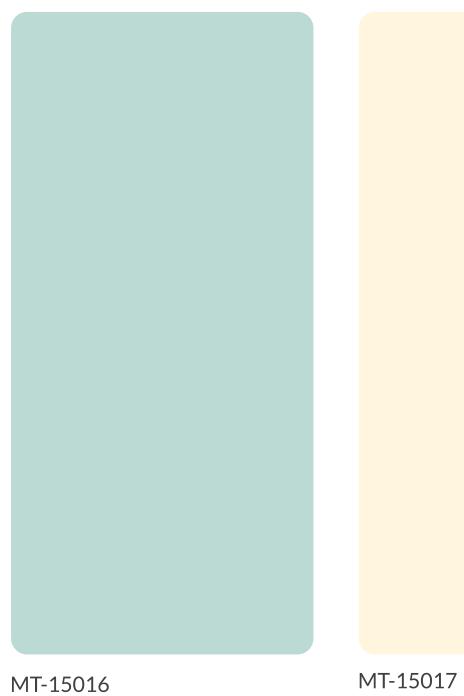



MT-15018

Creativity takes Courage

















MT-15102


Stay Magical









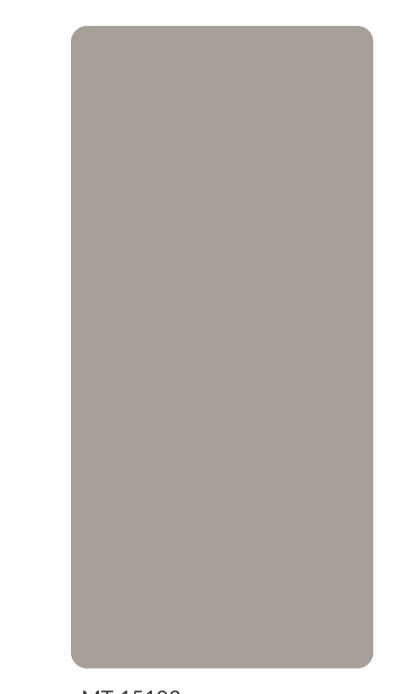

MT-15104

MT-15103

Impactful Creativity







Euro Pratik Special

- 1. Open the Thermolite Panels roll immediately. Do not pressurize while opening it.
- 2. Wipe the surface clean with cloth in light circular motion.
- 3. Inspect the material before taking delivery and prior to installation

### INSTALLATION

HANDLING

- 1. Cutting & Machining: Use standard wood working tools and equipment for cutting, routing and drilling. Sharpen your tools before using to remove any burns and feather corner edges.
- 2. Base Material: Standard quality material like plywood, high density particle or fiber board. The surface of the material must be smooth and free from high moisture content / grease / wax / dust / chips / any foreign particles. Do not paste the sheets on the printed / branding area of the plywood
- 3. Adhesives: Avoid synthetic rubber or heat-activated adhesives. We recommend "LUXEBOND" (Premium glue from EUROPRATIK)
- 4. Observe bonding process carefully and apply sufficient pressure
- 5. After the removal of protection film, there might be solvent on the surface from the adhesive coating of the protection film. It may attract dust because of an electrostatic charge.
- 6. Under normal circumstances, the 'Curing' process will take approximately 72 hours for the surface to be totally cured. In order to speed up the process, we recommend cleaning of the surface with Colin Glass Cleaner and Soft Micro fiber cloth.

# CLEANING & MAINTENANCE

- Avoid cleaning agent containing acids / alkalis / abrasives / alcohol-based / solvent based / petrol-based / pinewood-based / oil-based cleaners.
- Use soft and clean cloth (preferably micro fiber)
- Avoid exposure to direct sunlight, it can gravely affect Thermolite Panels appearance
- Avoid hot cookware or utensils putting directly on the Thermolite Panels.

# DISCLAIMER

The Images used in brochure is for artistic representation only and do not form part of any agreement or legal binding on part of EUROPRATIK.



High Gloss Finish



Anti Finger Print



Colour Core



Scratch Resistant



Easy to Clean



Durability & Strength



Resistance





Termite

100mm

240mm